

DVS4004/16-IN


Key Features

- 4/16 channel video and audio inputs
- H.264 video compression
- Full channel D1 realtime encoding
- Dual-stream


Specifications

	DVS4004-IN	DVS4016-IN
Video		
Video Input	4-ch,BNC	16-ch,BNC
Video Compression	H.264	
Video Bit Rate	D1/4CIF: 512 Kbit/s - 8192 Kbit/s; 2CIF: 256 Kbit/s - 4096 Kbit/s; CIF: 128 Kbit/s - 1024 Kbit/s	
Video Stream	1) H.264 single stream; 2) H.264 + H.264 dual-stream	
Audio		
Input	4-ch	16-ch
Output	1-ch	2-ch
Audio Compression	G.711μ	
Sound Track	Mono	
Mute	You can choose mute	
External Interface		
Network Interface	2 RJ45 10M/100M adaptive Ethernet Interface	
SFP Interface	1 100Base-Fx SFP	/
EPON Interface	1 100Mbps EPON subcard(optional)	/
USB Interface	1 USB2.0 interface	
Serial Interface	1 RS-232, 2 RS-485	
Alarm I/O	4/2	8/2
General		
Power Supply	12 VDC	100~240 VAC
Consumption	8 W (with subcard) 6 W (without subcard)	33 W
Working Environment	-10°C to 55°C(10 °F to 131 °F) 10% to 90% RH	
Weight	1.5 kg (3.3 lb)	3.0 kg (6.6 lb)
Dimensions (H×W×D)	40.0mm × 188.6mm × 250.0mm (1.57″ × 7.43″ × 9.84″)	43.6 ×440.0 × 240.0 mm (1.72″ × 17.32″ × 9.45″)

Dimensions

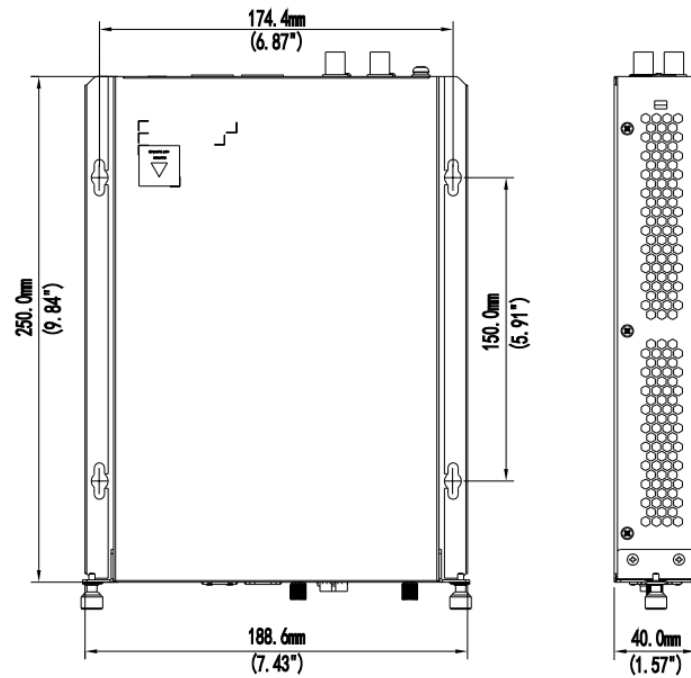


DVS4004-IN

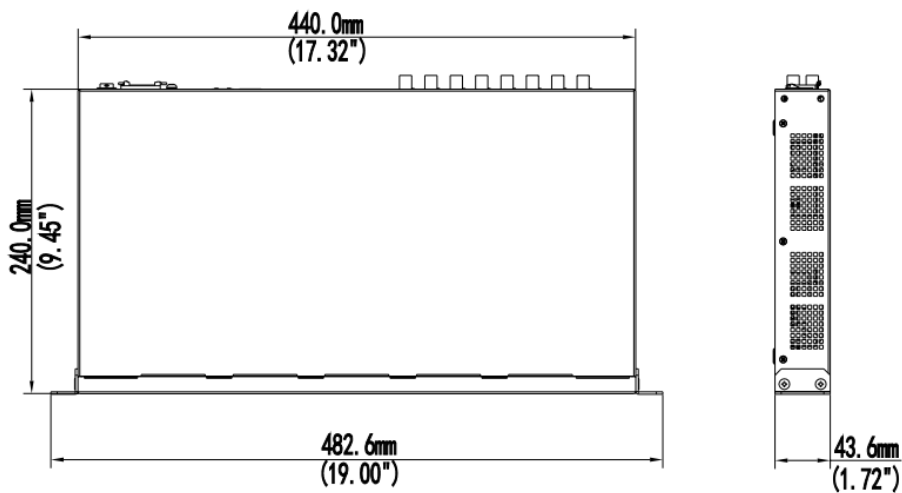


DVS4016-IN

Rear Panel

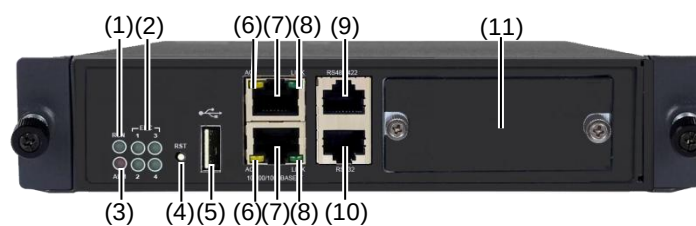


DVS4004-IN Front view

(1) Running LED	(2) Encoding LED	(3) Alarm LED
(4) Reset button	(5) USB port	(6) Active LED
(7) Ethernet port	(8) Link LED	(9) SFP
(10) RS-232 port	(11) Subcard slot	

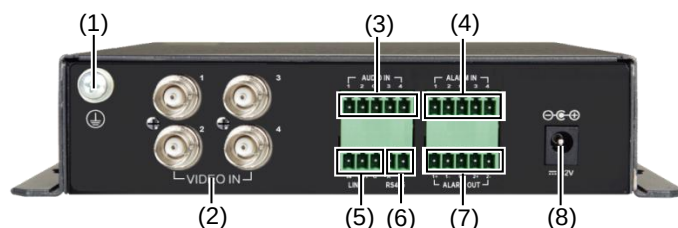

DVS4004-IN Rear view

(1) GND	(2) Video in port	(3) Audio in port
(4) Alarm in port	(5) LINE port	(6) RS-485 port
(7) Alarm out port	(8) Power input	

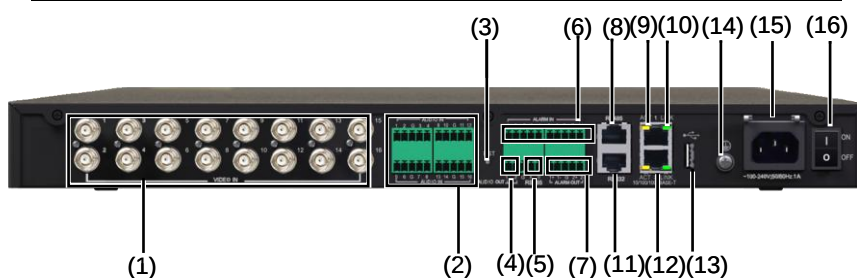

DVS4016-IN

(1) Video in port	(2) Audio in port	(3) Reset button
(4) Audio out port	(5) RS-485 port	(6) Alarm in port
(7) Alarm out port	(8) RS-485 port	(9) Active LED
(10) Link LED	(11) RS-232 port	(12) Ethernet port
(13) USB port	(14) GND	(15) Power input
(16) Power switch		

Zhejiang Uniview Technologies Co., Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2014 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.