

IPSAN1008-IN


Key Features

- Direct-to-iSCSI data block storage, accurate retrieval, instant playback
- 8 SATA HDDs up to 32TB
- Hot-swappable HDDs
- JBOD, RAID1, RAID5
- Hot spare disk for RAID5


Specifications

	IPSAN1008-IN
Storage	
HDD	8 SATA interfaces
Capacity	Up to 4TB for each HDD
Sync Storage	64-ch
External Interface	
Network Interface	2 RJ45 10M/100M/1000M adaptive Ethernet Interface
Serial Interface	1 RS-232, 1 RS-485
General	
Power Supply	100 ~ 240 VAC
Consumption	≤ 120 W (with all HDDs)
Working Environment	-10°C to 55°C(10 °F to 131 °F) 10% to 90% RH
Weight	Empty<10kg (22.0 lb) Fully Configured<16kg (35.3lb)
Dimensions (H×W×D)	86.1mm × 442.0mm × 530.4mm (3.3" × 17.4" × 20.9")

Dimensions

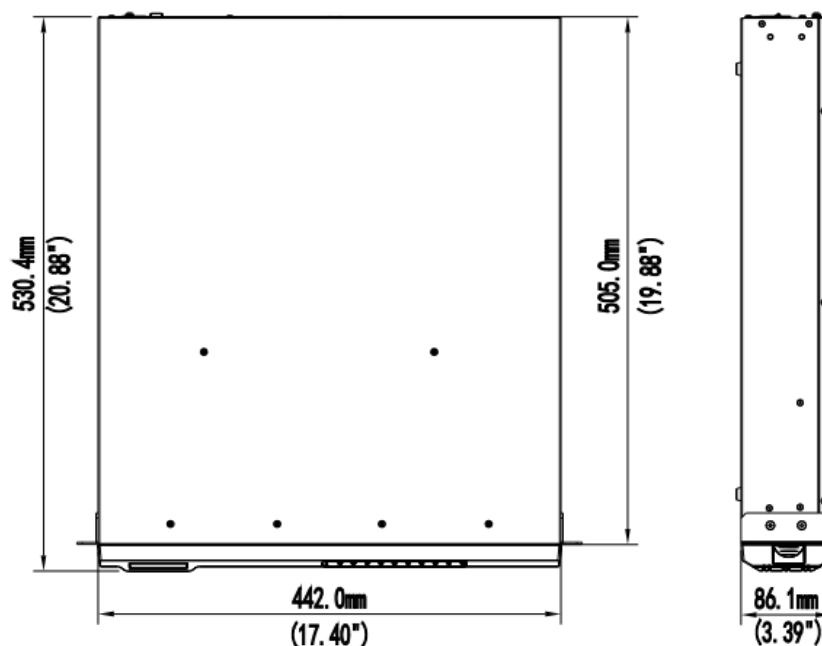

Rear Panel

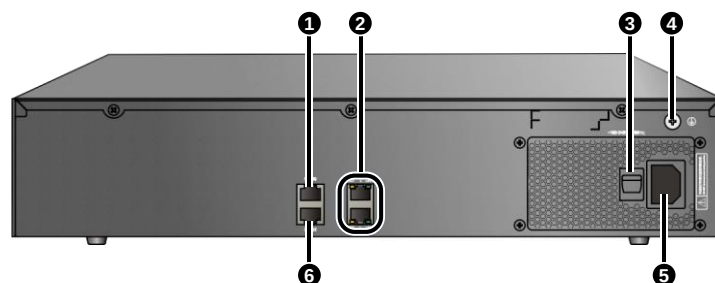

IPSAN1008-IN

(1) RS-485	(2) Network Interface	(3) Power Switch
(4) GND	(5) Power outlet	(6) RS-232

Zhejiang Uniview Technologies Co., Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2014 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.