

NVR208 Network Video Recorder

Key Features


- 16/32-channel 1080P input
- Third-party IP cameras supported with ONVIF conformance
- HDMI, VGA output up to 1080p
- accurate retrieval, instant playback
- 8 SATA HDDs up to 32TB
- Support for UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

Specifications


	NVR208-16-IN	NVR208-32-IN
Video		
IP Video Input	16-ch	32-ch
VGA Output	1-ch	
HDMI Output	1-ch	
Recording Resolution	1080P/720P/ D1/2CIF/CIF	
Sync Playback	16-ch 720P	
Audio		
Output	1-ch, RCA	
Two-way Talk	1-ch Input, 1-ch Output (Reuse the audio output channel), RCA	
Storage		
HDD	8 SATA interfaces	
Capacity	Up to 4TB capacity for each HDD	
External Interface		
Network Interface	2 RJ45 10M/100M/1000M adaptive Ethernet Interface	
USB Interface	2 USB2.0 interface, 1 USB3.0 interface	
Serial Interface	1 RS-232 , 1 RS-485	
Alarm I/O	8/2	
General		
Power Supply	100 ~ 240 VAC	
Consumption	20W (Without Disk) 90W (Fully Configured)	
Working Environment	-10°C to 55°C(10 °F to 131 °F) 10% to 90% RH	
Weight	Empty<5.5kg (12.1lb) Fully Configured<11kg (24.3lb)	

Dimensions (H×W×D)	86.1mm × 442.0mm × 421.0mm (3.39" × 17.40" × 16.57")
--------------------	--

Dimensions

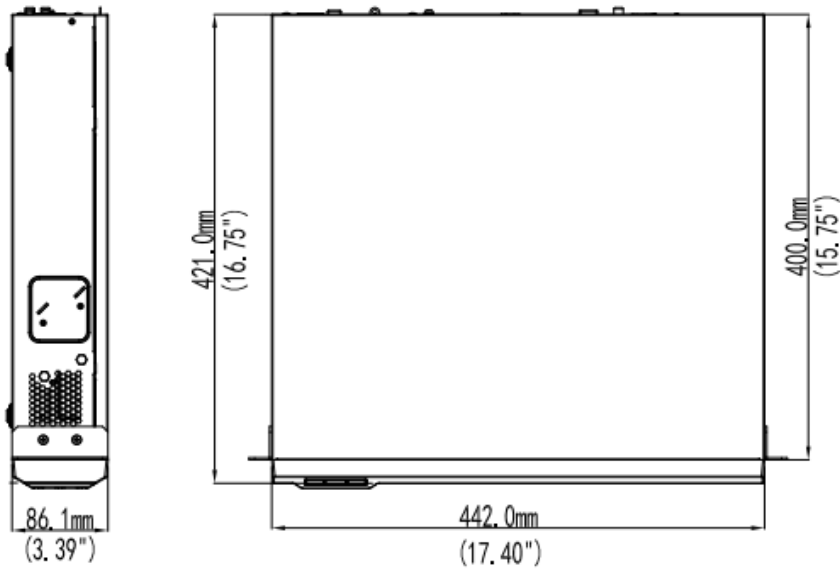

Rear Panel

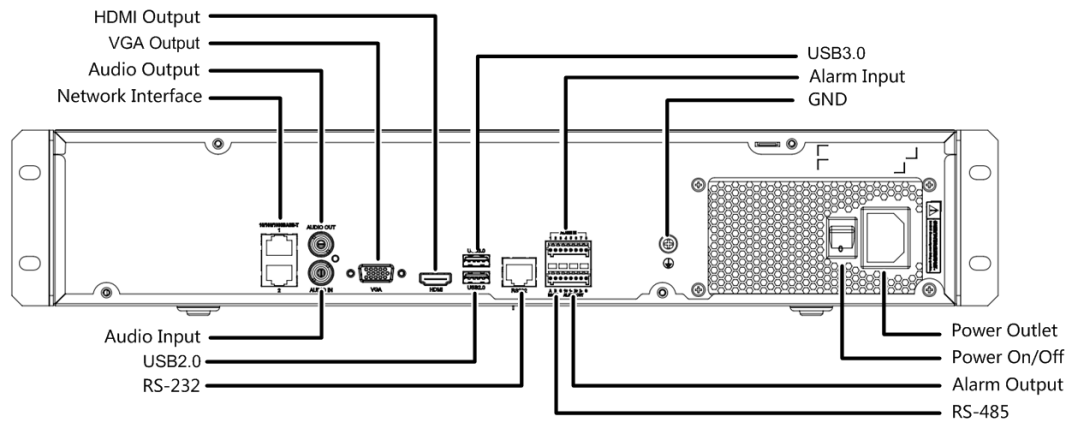

Zhejiang Uniview Technologies Co., Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2014 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.